


# Miniature- elastomer coupling I Series MJT / MJT-C

// MJT-C: standard series with radial clamping hub // MJT: cost- effective version with set screws  
 // plug in and oscillation damping // temperature range: -20°C up to +70°C


Technical data:

MJT/ MJT-C size	T <sub>N</sub> [Nm]	max. speed [min <sup>-1</sup> ]		moment of inertia [10 <sup>-6</sup> kgm <sup>2</sup> ]		torsional stiffness [10 <sup>-3</sup> Nm/arcmin]	max. shaft displacement (mm)		mass approx. [g]	tightening torque of screws [Nm]	
		MJT	MJT-C	MJT	MJT-C		axial ±	lateral		f	i
14-B	0,7	27.000	11.000	0,21	0,16	3	0,6	0,15	7	0,7	0,5
20-B	1,8	20.000	7.500	1,0	1,1	5	0,8	0,20	18	0,7	1
30-B	4	13.000	5000	5,9	6,2	13	1,0	0,20	48	1,7	2,5
14-R	2	27.000	11.000	0,21	0,16	7	0,6	0,10	7	0,7	0,5
20-R	5	19.000	7.500	1,0	1,1	16	0,8	0,10	18	0,7	1
30-R	12,5	13.000	5.000	5,9	6,2	38	1,0	0,10	48	1,7	2,5





Series MJT

Material:  
hubs: aluminium  
elastomerspider: polyurethane  
B 80-Sh-A (blau), R 98-Sh-A (rot)



Series MJT-C

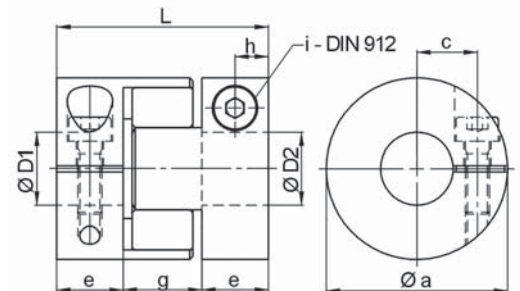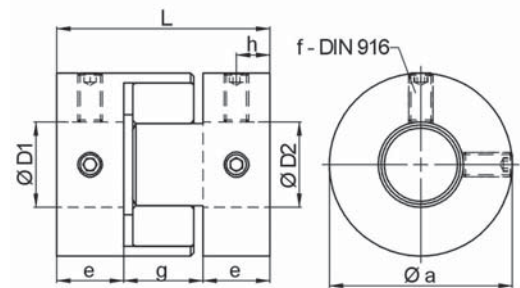

Dimensions: (mm) length dimensions according to DIN ISO 2768 cH

MJT/MJT-C	Øa	c	e	g	h	L	f	i
14	14	4	7	8	3,5	22	2x M3	M2
20	20	6,5	10	10	5	30	2x M3	M2,5
30	30	10	11	13	5,5	35	2x M4	M4

Stock bores D1/D2 (G7)

• MJT    o MJT-C

MJT/MJT-C	Ø3	Ø4	Ø5	Ø6	Ø6,35	Ø8	Ø9,53	Ø10	Ø12	Ø14
14	•	•o	•o	•						
20		o	•o	•o	•o	•o	•			
30						•o	•o	•o	•o	•

Remark: Further boresizes are possible on request.  
For a easier disassemblage of the MJT size we recommend to have end faces on the shaft.

temperature correction for nominal torques

-20°C bis +30°C	+50°C	+70°C
100%	75%	60%

Ordering example: MJT-B30 - D1 = 8<sup>H8</sup> D2 = 10<sup>H8</sup> MJT-C-R 20 - D1 = 5<sup>H8</sup> D2 = 6<sup>H8</sup>