


Elastomer Coupling I Series EKS

- pluggable, backlash-free, vibration-damping
- Expanding cone hub - radial clamping hub
- minimal space requirement with short overall length thanks to integrated attachment


technical data:

EKH size	nominal torque [Nm]	moment of inertia [10^{-3}kgm^2]	torsional stiffness (stat. $0,5 \times T_N$) [Nm/arcmin]	max. shaft misalignment [mm]		lateral spring rate [N/mm]	mass approx. [kg]	tightening torque of screws "f" [Nm]	
				axial \pm	lateral			Exp. hub i:	Clamp. hub f:
8	8	0,01	0,04	0,5	0,1	600	0,06	4	4
15	15	0,03	0,23	0,5	0,1	2100	0,2	8	8
50	50	0,16	0,60	0,5	0,1	2600	0,4	14	35
100	100	0,38	1,0	1	0,1	3300	0,7	35	65
200	200	0,9	2,0	1	0,12	4500	1,2	65	115
400	400	2,2	5,8	1	0,15	5900	1,7	115	115
600	600	5,0	8,0	1	0,15	7000	3	180	180

temperature range: -30°C bis +90°C

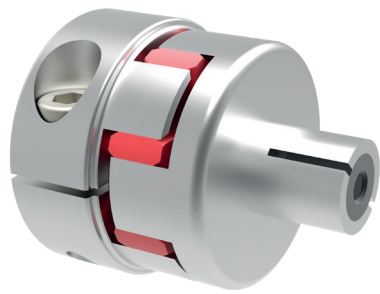

material:
 clamping hubs: high-strength aluminum
 expansion cone hub: heat treated steel
 elastomer spider: polyurethane 98 Sh-A
 screws: ISO 4762 12.9 - coated

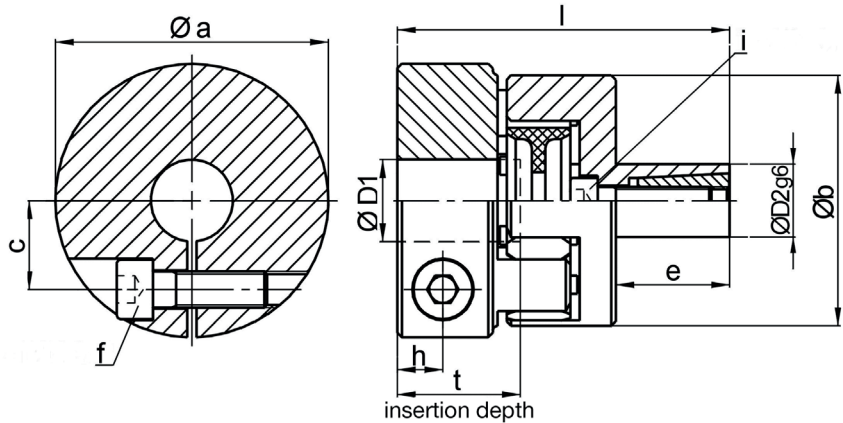


Dimensions [mm]: length dimensions according to DIN ISO 2768 cH

EKS	Ø a	Ø b	c	e	f	h	i	l	tmin	tmax	Ø D 1 min	Ø D 1 max	Ø D 2 min	Ø D 2 max
8	32	32	10,5	12	M 4	6	M 4	45	12	19	8	15	10	16
15	40	40	13	20	M 5	8	M 5	59	16	23	10	19	14	20
50	60	55	19,5	23	M 8	10	M 6	71	21	29	15	29	16	24
100	70	65	23	26	M 10	12	M 8	81,5	25	34	22	33	20	28
200	85	80	29	30	M 12	14	M 10	93	30	41	30	42	24	35
400	100	100	36	32	M 12	16	M 12	101	32	44	38	56	32	42
600	120	120	44	42	M 14	18	M 14	122	37	51	40	70	35	48

note: The corresponding shaft hole for the Expansion cone spigot >> ØD2 << with manufacturing tolerance H7.

application example:
 EKS coupling integrated on the output side to a gear unit

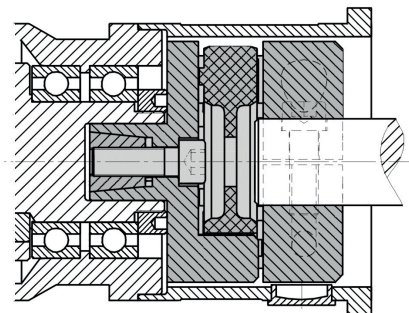

order example: EKS 50 - D1 = Ø 18^{G7} D2 = Ø 20^{g6}