



Elastomer Coupling I Series ESM-A

// with conical hub and clamping ring // plug-in // backlash-free
 // rotational symmetry // high speeds

technical data:

ESM-A	T _N	hardness	moment of inertia	torsional stiffness	max shaft mis-	lateral	mass	tightening torque	max.
size	[Nm]	[Shore]	[10 ⁻³ kgm ²]	(stat. at 0,5 x T _N)	alignment (mm)	spring rate	approx.	of screws	speed
				[Nm/arcmin]	axial ± lateral	[N/mm]	[kg]	[Nm]	[min ⁻¹]
10	10	98Sh-A	0,015	0,09	0,5 0,1	600	0,11	2	30.000
17	17	98Sh-A	0,05	0,24	0,5 0,1	2100	0,28	3	24.000
25	25	72Sh-D	0,06	0,46	0,5 0,07	2900	0,28	3	24.000
43	43	98Sh-A	0,19	0,7	0,5 0,1	2500	0,4	6	19.000
50	50	72Sh-D	0,19	1,1	0,5 0,07	3600	0,4	6	19.000
60	60	98Sh-A	0,28	1,0	0,5 0,1	2600	0,6	6	17.500
90	90	72Sh-D	0,28	2,0	0,5 0,07	3700	0,6	6	17.500
150	150	98Sh-A	0,65	1,20	1 0,1	3300	0,9	6	15.000
200	200	72Sh-D	0,65	2,30	1 0,07	4600	0,9	6	15.000
320	320	98Sh-A	2,0	3,6	1 0,12	4500	1,9	30	12000
400	400	72Sh-D	2,0	7,0	1 0,1	6500	1,9	30	12.000
500	500	98Sh-A	5,6	4,5	1 0,15	5900	4,5	50	9.500
700	700	98Sh-A	13,0	8,0	1 0,15	7000	7,0	100	8.000
1000	1000	72Sh-D	13,0	12	1 0,10	9600	7,0	100	8.000
2000	2000	98Sh-A	75	21	1 0,15	9000	20,4	100	6.000

material:

elastomer spider: polyurethane



(size 2000: tempered steel)

screws: ISO 4762 / 12.9

conical hub: high-tensile

aluminum clamping ring:

heat treated steel - burnished

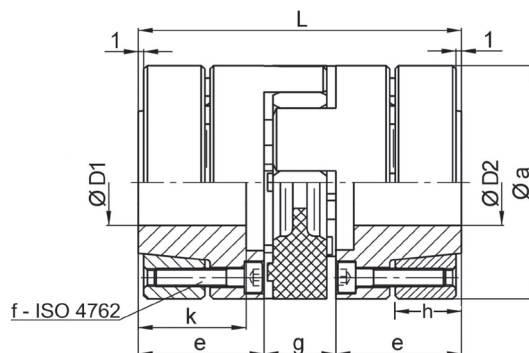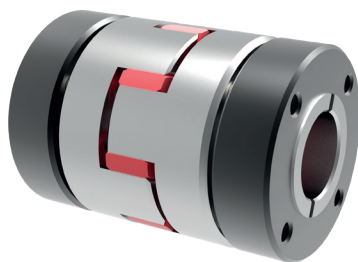

Dimensions [mm]: length dimensions according to DIN ISO 2768 cH

ESM-A	Ø a	e	f	g	h	k	L	Ø D 1/2 min	Ø D 1/2 max	Ø D 1/2 prebored
10	32	18,5	4x M 3	13	12	15,5	50	6	14	5
17	40	25	6x M 4	16	12	21	66	9	19	9
25	40	25	6x M 4	16	12	21	66	10	19	9
43	50	30	4x M 5	18	14	25	78	12	24	10
50	50	30	4x M 5	18	14	25	78	15	24	10
60	55	30	4x M 5	18	14	25	78	13	26	12
90	55	30	4x M 5	18	14	25	78	17	26	12
150	65	35	8x M 5	20	17	30	90	17	36	12
200	65	35	8x M 5	20	17	30	90	19	36	12
320	80	45	4x M 8	24	22	40	114	20	40	18
400	80	45	4x M 8	24	22	40	114	25	40	18
500	100	55	4x M 10	28	26	49	138	22	48	20
700	120	61	4x M 12	33	31	54	155	25	60	24
1000	120	61	4x M 12	33	31	54	155	25	60	24
2000	160	73	8x M 12	40	40	66	186	35	85	34

order example: ESM-A 150 - D1 = 17 ^{G7} D2 = 22 ^{H6}