

MACHINE MODEL

GBS 171

Small format manual bandsaw machine


Short description

GBS 171 is the bandsaw for small carpentry cuts and installers. This machine can be used in various professional contexts for small productions and cuts from 0 ° to 60 °.




Cutting capacity at 0 °	Round: 170mm - Square: 170mm - Rectangle: 170x170mm
Cutting capacity: 45 ° left	Round: 130mm - Square: 130mm - Rectangle: 130x130mm
Cutting capacity: at 60 ° left	Round: 85mm - Square: 80mm - Rectangle: 80x80mm
Blade dimensions	2035x20x0,9m
Blade motor	1.5 KW
Blade speed	30/80 m/min
Weight	38kg
Dimensions	430x1000x500mm - h 845mm

Features



Work surface

GBS 171 has a large work surface with rotation integral with the bow designed to avoid incisions on the fifth wheel for easy rotation.

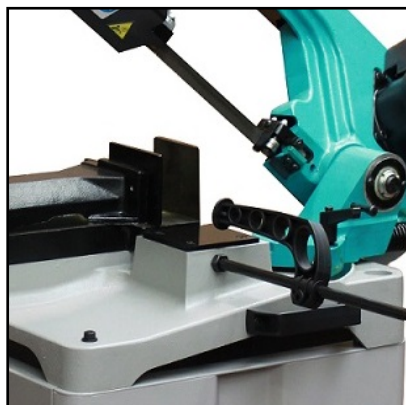

Vice

The vice with adjustable guides, sliding transversely on the work surface and quick approach to the cutting material.



Bandsaw blade

The bimetal blade has a size of 2035x20x0.9mm with a speed of use of between 30 and 70 meters per minute making it the ideal tool for processing steel and cast iron.



Bar Support (Optional)

OPTIONAL

Bar support adjustable in height from 710 to 1100 mm. Width 260mm, max capacity 150 kg .



Connection for loading table (Optional)

OPTIONAL

Connecting element for roller table for the loading side.



Connection for unloading side (Optional)

OPTIONAL

Connecting element for roller table for the unloading side.



Loading /unloading table (Optional)

OPTIONAL

First element of the roller table, compatible for both the loading and unloading sides. Length 2m, capacity 700kg.



Loading/unloading table , following element (Optional)

OPTIONAL

Following element for roller table compatible for both loading and unloading sides, length 2m, capacity 600 kg.



Roller table with metric rod (Optional)

OPTIONAL

Unloading roller table with metric rod and length stop . 1st element with 2m length and max.capacity 700kg



Roller table with mmetric rod (Optional)

OPTIONAL

Unloading roller table with metric rod and length stop, following element with 2m length and max. capacity 600kg.



Pair of vertical rollers (Optional)

OPTIONAL

Steel containment element. Maximum 2 pairs. single element 2mt. To be used without rollers cover, only for RTS.