



SINCE 1980



PEIPING

UNIVERSAL TOOL & CUTTER GRINDER

Dedicated to the pursuance of perfect design and manufacturing concept, incorporating with the continuous innovation and breakthrough. The wide range of precision tool grinders from PEIPING provide the superior operation performance.



PEIPING PRECISION ENTERPRISE CO., LTD.



COMPANY PROFILE

PEIPING PRECISION ENTERPRISE CO., LTD. was established in 1980 and has been dedicated to the research and improvement of tool & cutter grinders all the time. All of the products have passed the quality inspection precisely. In addition, PEIPING PRECISION had got the Gold Medal winner at Geneva Invention and had many kinds of patents: No. 75717, No. 42447, No. 21204, etc. The quality of products is trustworthy by the customers.

Business Philosophy

PEIPING upholds the business philosophy of "Sustainability, Growth and Excellence". With changes in time, we have imported the advanced science and technology and developed the high technical products to meet the customers' needs. At present, PEIPING PRECISION is the main professional manufacturer of tool & cutter grinder in Taiwan. Especially, we are the only producer for drill grinder that biggest drill grinding diameter is 100mm.

Global Marketing

Our products have been sold to Europe, United States, Latin America, Asia, Middle East, Oceania, etc.

PEIPING PRECISION has the expert technique. We sincerely welcome the customers to inquire about the machinery and to have an opportunity to cooperate with us.



- Awarded Geneva Golden Prize of Invention Patent No. 21204

*Internationally
Recognized Brand*



SINCE 1980



PP-32N Universal Cutter Grinder

Features:

- The wheel heads can be rotated 360° and be installed two wheels. Just rotate the wheel head, when need to grind the tool of different materials. It can increase the safety & save the time for changing & repairing the grinding wheel.
- Adopts the precision 4" 6-jaw awl type chuck. It can clip stably. At the same time, it can grind the cutting edge and web thickness of drills in one set-up. The both sides of drill angle and the edge length are equal. It could keep the accuracy of the center of drill without offset.
- Easy operation, grind fast and precisely.

The types of tools to be ground:

Drill, step drill, center drill, spotting drill, countersink cutter, tap, chamfer cutter, edge of end mill, engraving tool, sheet metal drill, round bar, etc.



Patent No.75717
Patented replacement-free unique cam.



SPECIFICATIONS

Model No.	PP-32N
Grinding Capacity	φ 2 mm~ φ 32 mm
Longitudinal Travel of Table	120 mm
Horizontal Travel of Table	135 mm
Rotating Angle of Wheel Head	360°
Point Angle of Drill	90°~180°
Size of Wheel	125x50x31.75 mm
Speed of Wheel	50HZ 2850 rpm 60HZ 3450 rpm
Horse Power / Voltage	3/4HP ; 110V / 220V / 380V / 415V
Net Weight / Gross Weight	90 kgs / 120 kgs
Packing Size (LxWxH)	95x55x68 cm

Standard Accessories:

1. 4" 6-jaw Awl Type Chuck-1 SET
2. Grinding Wheel(Type:6A)-1 PC
3. Grinding Wheel(Type:11A)-1 PC
4. Grinding Wheel Flange-2 SETS
5. Flange Wrench-1 PC
6. Chuck Handle-1 PC
7. Morse Taper Sleeve-1 PC(No.3)
8. Screw Pin-6 PCS
9. Work Light-1 SET
10. Tools for General Use-1 SET

Optional Accessories:

1. SDC Electroplated Grinding Wheel
2. CBN Electroplated Grinding Wheel
3. Morse Taper Sleeve (No.2)
4. Work Cabinet



PP-600

Universal Tool & Cutter Grinder

Features:


- There are two types of wheel head: single or double.
- Adopt high precision cross roller guide on the table.
The table is stable and can be operated smoothly.
- Adopt cast iron with high toughness.
It can keep the precision of the machine in the long term.
- There is a series of grinding attachments to choose from.

The types of tools to be ground include:

Drill, tap, (taper) end mill, (corner) radius end mill, turning tool, radius turning tool, chamfer cutter, countersink cutter, engraving cutter, side milling cutter, hob, reamer, gun drill, hole saw, annular cutter, slitting cutter, punch, round bar, etc.

SPECIFICATIONS

Model No.	PP-600/PP-600-DW
Longitudinal Travel of Table	185 mm
Horizontal Travel of Table	120 mm
Working Table Area	520x125 mm
Vertical Adjustment of Wheel Head	140 mm
Rotating Angle of Wheel Head	360°
Size of Wheel	125x50x31.75 mm
Speed of Wheel	50HZ 2850 rpm 60HZ 3450 rpm
Horse Power / Voltage	1/2HP ; 220V / 380V / 415V
Net Weight / Gross Weight	130 kgs / 165 kgs
Packing Size (LxWxH)	80x75x82 cm

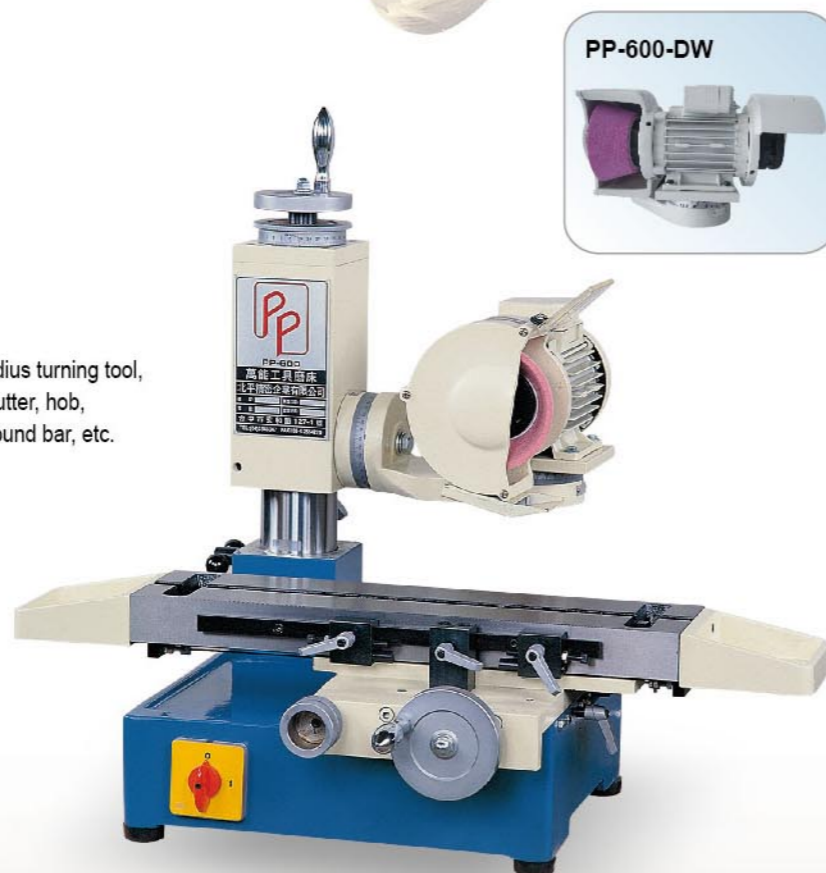

PP-600-DW

Standard Accessories:


- Grinding Wheel(Type:11A)-1 PC
- PP-600:Grinding Wheel Flange-1 SET
PP-600-DW:Grinding Wheel Flange-2 SETS
- Flange Wrench-1 PC
- Work Light-1 SET
- Tools for General Use-1 SET

Optional Accessories:

- SDC Electroplated Grinding Wheel
- CBN Electroplated Grinding Wheel
- 5C Collet (Min.3mm~ Max.25mm)
- 5C Special Collet (32mm/42mm)
- Morse Taper Sleeve (No.2)
- Work Cabinet

Grinding Attachment

600K 50K Tool & Cutter Grinding Attachment $\phi 2\text{mm} \sim \phi 32\text{mm}$

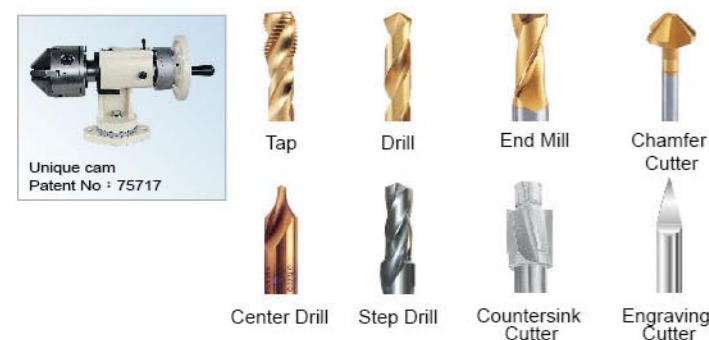

50SA Helical Tool Grinding Attachment $\phi 6\text{mm} \sim \phi 32\text{mm}$



600D 50D End Mill Grinding Attachment



50E Radius End Mill Grinding Attachment $\phi 3\text{mm} \sim \phi 25\text{mm}$



PP-50

Universal Tool & Cutter Grinder

Features:

- The wheel heads can be rotated 360° and be installed two wheels.
Just rotate the wheel head, when need to grind the tool of different materials.
It can increase the safety & save the time for changing & repairing the grinding wheel.
- Adopt high precision cross roller guide on the table. The table is stable and can be operated smoothly.
- Adopt cast iron with high toughness. It can keep the precision of the machine in the long term.
- There is a series of grinding attachments to choose from.

The types of tools to be ground include:

Drill, tap, (taper) end mill, (corner) radius end mill, turning tool, radius turning tool, chamfer cutter, countersink cutter, engraving cutter, side milling cutter, hob, reamer, gun drill, hole saw, annular cutter, slitting cutter, punch, round bar, etc.

SPECIFICATIONS

Model No.	PP-50
Longitudinal Travel of Table	230 mm
Horizontal Travel of Table	180 mm
Working Table Area	620x190 mm
Vertical Adjustment of Wheel Head	120 mm
Rotating Angle of Wheel Head	360°(A-axis+dual C-axis)
Size of Wheel	125x50x31.75 mm 180x25x31.75 mm
Speed of Wheel	50HZ 2850 rpm 60HZ 3450 rpm
Horse Power / Voltage	3/4HP ; 220V / 380V / 415V
Net Weight / Gross Weight	252 kgs / 310 kgs
Packing Size (LxWxH)	105x85x154 cm

Patent No. 42447

The spindle of wheel head is designed with A-axis+dual C-axis.
The motor can be rotated 360°.
Set the radial rake and relief angle easily It can increase the grinding range & function of machinery.



Standard Accessories:

- Grinding Wheel(Type:5A)-1 PC
- Grinding Wheel(Type:11A)-1 PC
- Grinding Wheel Flange-2 SETS
- Flange Wrench-1 PC
- Work Light-1 SET
- Tools for General Use-1 SET
- Work Cabinet-1 SET

Optional Accessories:

- SDC Electroplated Grinding Wheel
- CBN Electroplated Grinding Wheel
- 5C Collet (Min.3mm~ Max.25mm)
- 5C Special Collet (32mm/42mm)
- Morse Taper Sleeve (No.2)

Grinding Attachment

600F 50F Turning Tool Grinding Attachment



50EF Radius Turning Tool Grinding Attachment



50B Drill & Tap Grinding Attachment $\phi 2\text{mm} \sim \phi 60\text{mm}$



50H Tool Grinding Attachment



PP-60N

Universal Drill & Tap Grinder

Features:

- There are two types of grinding wheels (5A & 12A) on wheel head of PP-60N. The end & chisel edge can be ground without changing the grinding wheel.
- For dressing grinding wheel, set the diamond dresser on the chuck and adjust the wheel head angle. The wheel motor can be adjusted 160mm vertically and rotate 180°. It can increase the function of machinery.
- Adopts the precision awl type chuck. It can clip stably. At the same time, it can grind the cutting edge and web thickness of drills in one set-up. The both sides of drill angle and the edge length are equal. It could keep the accuracy of the center of drill without offset.
- Easy operation, grind fast and precisely.

The types of tools to be ground:

Drill, step drill, center drill, spotting drill, countersink cutter, tap, chamfer cutter, edge of end mill, engraving tool, sheet metal drill, round bar, etc.

SPECIFICATIONS

Model No.	PP-60N
Grinding Capacity	φ 2 mm~ φ 60 mm
Longitudinal Travel of Table	245 mm
Horizontal Trave of Table	180 mm
Vertical Adjustment of Wheel Head	160 mm
Clearance Angle of Drill	0°~18°
Point Angle of Drill	40°~180°
Size of Wheel	180x19x31.75 mm 180x32x31.75 mm
Speed of Wheel	50HZ 2800 rpm 60HZ 3360 rpm
Horse Power / Voltage	1HP ; 220V / 380V / 415V
Net Weight / Gross Weight	240 kgs / 310 kgs
Packing Size (LxWxH)	100x95x156 cm

PP-60N Standard Accessories:

- 6" 6-jaw Awl Type Chuck-1 SET
- Chuck Handle-1 PC
- Grinding Wheel(Type:5A)-1 PC
- Grinding Wheel(Type:12A)-1 PC
- Grinding Wheel Flange-1 SET
- Flange Wrench-1 PC

- Morse Taper Sleeve- 3 PCS (No.3,4,5)
- Cam-5 PCS (No.4,6,8,9,A2)
- Work Light-1 SET
- Tools for General Use-1 SET
- Work Cabinet-1 SET

PP-60N Optional Accessories:

- SDC Electroplated Grinding Wheel
- CBN Electroplated Grinding Wheel
- Cooling System
- Auto Cycle Motor



Patent No. 135236
Double cams. It can grind tool of 1/2/3/4/6 Flutes.



PP-80N/100N

Universal Drill & Tap Grinder

Features:

- For dressing grinding wheel, set the diamond dresser on the chuck and adjust the wheel head angle. The wheel motor can be adjusted 160mm vertically and rotate 180°. It can increase the function of machinery.
- Adopts the precision awl type chuck. It can clip stably. At the same time, it can grind the cutting edge and web thickness of drills in one set-up. The both sides of drill angle and the edge length are equal. It could keep the accuracy of the center of drill without offset.
- Easy operation, grind fast and precisely.

The types of tools to be ground:

Drill, step drill, center drill, spotting drill, countersink cutter, tap, chamfer cutter, edge of end mill, engraving tool, sheet metal drill, round bar, etc.

SPECIFICATIONS

Model No.	PP-80N	PP-100N
Grinding Capacity	φ 4 mm~ φ 80 mm	φ 5 mm~ φ 100 mm
Longitudinal Travel of Table	245 mm	245 mm
Horizontal Trave of Table	180 mm	180 mm
Vertical Adjustment of Wheel Head	160 mm	160 mm
Clearance Angle of Drill	0°~18°	0°~18°
Point Angle of Drill	40°~180°	40°~180°
Size of Wheel	180x50x31.75 mm	180x50x31.75 mm
Speed of Wheel	50HZ 2800 rpm 60HZ 3360 rpm	
Horse Power / Voltage	1HP ; 220V / 380V / 415V	
Net Weight / Gross Weight	300 kgs / 360 kgs	305 kgs / 365 kgs
Packing Size (LxWxH)	112x100x154 cm	112x100x154 cm

PP-80N/100N Standard Accessories:

- PP-80N: 7" 6-jaw Awl Type Chuck-1 SET;
PP-100N: 9" 8-jaw Awl Type Chuck-1 SET
- Chuck Handle-1 PC
- Grinding Wheel(Type:7A)-1 PC
- Grinding Wheel Flange-1 SET
- Flange Wrench-1 PC
- Morse Taper Sleeve- 4 PCS (No.3,4,5,6)

- Cam-5 PCS (No.4,6,8,9,A2)
- Auto Cycle Motor-1 SET
- Cooling System-1 SET
- Work Light-1 SET
- Tools for General Use-1 SET
- Work Cabinet-1 SET

PP-80N/100N Optional Accessories:

- SDC Electroplated Grinding Wheel
- CBN Electroplated Grinding Wheel



Patent No. 135236
Double cams. It can grind tool of 1/2/3/4/6 Flutes.



PP-08 / PP-08L Gun Drill Grinder

Features:

- I. PP-08 series applies the leverage. It can grind the internal and external angle of gun drill.
- II. Adopts the precision 6-jaw awl type chuck. It can clip stably. At the same time, it can grind the cutting edge and web thickness of drills in one set-up. The both sides of drill angle and the edge length are equal. It could keep the accuracy of the center of drill without offset.

SPECIFICATIONS

Model No.	PP-08	PP-08L
Grinding Capacity	φ 2mm~φ 32 mm	φ 5mm~φ 60 mm
Longitudinal Travel of Table	185 mm	230 mm
Horizontal Travel of Table	120 mm	180 mm
Working Table Area	520x125 mm	620x190 mm
Vertical Adjustment of Wheel Head	140 mm	120 mm
Rotating Angle of Wheel Head	360°	360°(A-axis+dual C-axis)
Size of Wheel	125x50x31.75 mm	125x50x31.75 mm
Speed of Wheel	50HZ 2850 rpm ; 60HZ 3450 rpm	
Horse Power / Voltage	1/2HP ; 220V / 380V / 415V	
Net Weight / Gross Weight	150 kgs / 210 kgs	285 kgs / 340 kgs
Packing Size (LxWxH)	86x82x155 cm	105x85x154 cm

Standard Accessories:

1. PP-08: Grinding Attachment for Gun Drill(φ 2mm~φ 32mm)-1 SET
- PP-08L: Grinding Attachment for Gun Drill(φ 5mm~φ 60mm)-1 SET
2. SDC Resinoid Grinding Wheel(Type:11A2)-1 PC
3. Grinding Wheel Flange-1 SET
4. Flange Wrench-1 PC
5. Tool Fixed Block-1 PC
6. Work Light-1 SET
7. Tools for General Use-1 SET
8. Work Cabinet-1 SET



PP-11 Hole Saw & Annular Cutter Grinder

Features:

- I. The maximum grinding capacity is 100mm.
- II. Adopts the precision 6-jaw awl type chuck. It can clip stably and grind precisely.
- III. It can grind the internal and external angle of tools within minimum angle.

SPECIFICATIONS

Model No.	PP-11
Longitudinal Travel of Table	185 mm
Horizontal Travel of Table	120mm
Working Table Area	520x125 mm
Vertical Adjustment of Wheel Head	140 mm
Rotating Angle of Wheel Head	360°
Size of Wheel	100x30x31.75 mm
Speed of Wheel	50HZ 2850 rpm 60HZ 3450 rpm
Horse Power / Voltage	1/2HP ; 220V / 380V / 415V
Net Weight / Gross Weight	155 kgs / 185 kgs
Packing Size (LxWxH)	80x75x82 cm

Standard Accessories:

1. SDC Electroplated Grinding Wheel(Type:6A2)-1 PC
2. Grinding Wheel Flange-1 SET
3. Flange Wrench-1 PC
4. Tools for General Use-1 SET

Optional Accessories:

1. SDC Electroplated Grinding Wheel
2. CBN Electroplated Grinding Wheel
3. Work Cabinet



PP-50S Slitting Cutter Grinder

Features:

- I. Max. Grinding Capacity: Standard 440mm; Oversize 600mm.
- II. Suitable for round knife, slitter knife and slitting cutter.

SPECIFICATIONS

Model No.	PP-50S
Longitudinal Travel of Table	230 mm
Horizontal Travel of Table	180 mm
Working Table Area	620x190 mm
Vertical Adjustment of Wheel Head	120 mm
Rotating Angle of Wheel Head	360°(A-axis+dual C-axis)
Size of Wheel	125x50x31.75 mm 180x25x31.75 mm 180x3x31.75 mm
Speed of Wheel	50HZ 2850 rpm 60HZ 3450 rpm
Horse Power / Voltage	3/4HP ; 220V / 380V / 415V
Net Weight / Gross Weight	295 kgs / 350 kgs
Packing Size (LxWxH)	105x85x154 cm

Standard Accessories:

1. Grinding Wheel(Type:5A)-1 PC
2. Grinding Wheel(Type:11A)-1 PC
3. CBN Resinoid Grinding Wheel(Type:1A1R)-1 PC
4. Shaft-1 PC
5. Grinding Wheel Flange-2 SETS
6. Flange Wrench-1 PC
7. Speed Control Motor-1 SET
8. Cooling System-1 SET
9. Work Light-1 SET
10. Tools for General Use-1 SET
11. Work Cabinet-1 SET

Optional Accessories:

1. CBN Resinoid Grinding Wheel
2. Shaft (Customized Specification)
3. Oversize Grinding Attachment
4. X-axis Speed Control Motor with Reciprocation Device



PP-50T / PP-50TL

Straight Flute Tap Grinder

Features:

- I. Suitable for straight flute of nut tap (bent shank), spiral point tap, hand tap and pipe tap.

SPECIFICATIONS

Model No.	PP-50T	PP-50TL
Grinding Capacity	φ 2 mm~φ 32 mm	φ 5 mm~φ 60 mm
Longitudinal Travel of Table	230 mm	230 mm
Horizontal Travel of Table	180 mm	180 mm
Working Table Area	620x190 mm	620x190 mm
Vertical Adjustment of Wheel Head	120 mm	120 mm
Rotating Angle of Wheel Head	360°(A-axis+dual C-axis)	
Size of Wheel	180x19x31.75 mm	145x15x31.75 mm / 175x15x31.75 mm
Speed of Wheel	50HZ 2850 rpm 60HZ 3450 rpm	
Horse Power / Voltage	3/4HP ; 220V / 380V / 415V	
Net Weight / Gross Weight	295 kgs / 350 kgs	310 kgs / 365 kgs
Packing Size (LxWxH)	105x85x154 cm	105x85x154 cm

Standard Accessories:

1. PP-50T: Grinding Attachment for Straight Flute Tap(φ 2mm~φ 32mm)-1 SET
PP-50TL: Grinding Attachment for Straight Flute Tap(φ 5mm~φ 60mm)-1 SET
2. Grinding Wheel(Type:12A)-1 PC
3. CBN Electroplated Grinding Wheel(Type:12AR)-1 PC
4. Grinding Wheel Flange-2 SETS
5. Flange Wrench-1 PC
6. Index Plate(3.4.5 Flutes)-1 PC
7. Cooling System-1 SET
8. Work Light-1 SET
9. Tools for General Use-1 SET
10. Work Cabinet-1 SET

Optional Accessories:

1. SDC Electroplated Grinding Wheel
2. CBN Electroplated Grinding Wheel
3. X-axis Speed Control Motor with Reciprocation Device



PP-25

Precision End Mill Grinder

Features:

- I. Specially designed for grinding end cutting edge, relief (chip space), end gash and peripheral cutting edge. Just set up once.

SPECIFICATIONS


Model No.	PP-25
Grinding Capacity	φ 3 mm~φ 25 mm
Longitudinal Travel of Table	50 mm
Horizontal Travel of Table	50 mm
Size of Wheel	125x50x31.75 mm
Speed of Wheel	50HZ 2850 rpm 60HZ 3450 rpm
Horse Power / Voltage	1/2HP ; 110V / 220V / 380V / 415V
Net Weight / Gross Weight	50 kgs / 75 kgs
Packing Size (LxWxH)	80x65x68 cm

Standard Accessories:

1. Grinding Wheel(Type:11A)-1 PC
2. Grinding Wheel Flange-1 SET
3. Flange Wrench-1 PC
4. 5C Collet-7 PCS (6,8,10,12,16,20,25mm)
5. Work Light-1 SET
6. Tools for General Use-1 SET

Optional Accessories:

1. SDC Electroplated Grinding Wheel
2. CBN Electroplated Grinding Wheel
3. 5C Collet (Min.3mm~ Max.25mm)
4. Work Cabinet

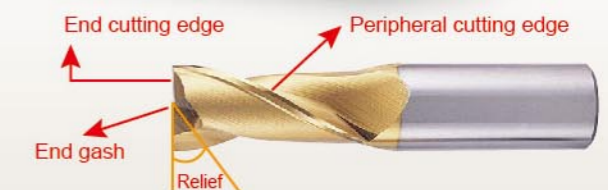

PP-U2

Universal Cutter Grinder

Features:

- I. The index head is universal: It can set the taper angle and relief angle. Rotate 360° and 180°. It can grind round, half round, taper angle and right angle of engraving tools.
- II. It is provided at 24 positions so that any particular angle or shape can be obtained.
- III. There are special grinding attachments for flutes of end mill, drill and lathe tool.

SPECIFICATIONS

Model No.	PP-U2
Max. Collet Capacity	18 mm
Max. Grinding Dimension	25 mm
Taper Angle	0°~180°
Relief Angle	0°~45°
Negative Taper Angle	0°~26°
Size of Wheel	100x50x20 mm
Speed of Spindle	3600 rpm
Horse Power / Voltage	1/3HP ; 110V / 220V / 380V / 415V
Net Weight / Gross Weight	33 kgs / 42 kgs
Packing Size (LxWxH)	55x45x47 cm

Standard Accessories:

1. Diamond Dresser-1 PC
2. Grinding Wheel(Type:6A)-1 PC
3. Grinding Wheel Flange-1 SET
4. U2 Collets-5 PCS (4,6,8,10,12mm)
5. Aligning Finger-1 PC
6. Drive Belt-1 SET
7. Lock Pin-1 SET
8. Tools-1 SET

Optional Accessories:

1. Grinding Attachment for Drill
2. Grinding Attachment for End Mill
3. Grinding Attachment for Lathe Tool
4. Grinding Attachment for φ 20 & φ 25mm
5. Microscope
6. Grinding Wheel Balancing Stand
7. PP-U2 Collets- 1, 2, 2.5, 3, 5, 7, 9, 18, 20, 25mm and 1/8", 1/4", 5/16", 3/8", 1/2", 5/8"
8. Electroplated Grinding Wheel
9. Work Cabinet



PP-125 Turning Tool Grinder

Features:

- Suitable for various types of turning tool.
- Wheel rotation is reversible. Allows for right or left hand grinding.

SPECIFICATIONS

Model No.	PP-125
Point Angle of Tool	90°~180°
Back Rake Angle of Tool	0°~15°
Size of Wheel	125x16x25 mm
Speed of Wheel	3420 rpm
Horse Power / Voltage	1/3HP ; 110V / 220V
Net Weight / Gross Weight	33 kgs / 35 kgs
Packing Size (LxWxH)	50x40x40 cm

Standard Accessories:

- SDC Resinoid Grinding Wheel(12Y9C)-1 PC
- Work Light-1 SET

Optional Accessories:

- SDC Resinoid Grinding Wheel
- CBN Resinoid Grinding Wheel



PP-400 Auto Saw Blade Grinder

Features:

- Suitable for HSS circular saw blade.
- Fast grinding and simple operation.

SPECIFICATIONS


Model No.	PP-400
Grinding Capacity	φ 20 mm~ φ 400 mm
Size of Wheel	150x7x50Vx19.05 mm
Speed of Wheel	4000 rpm
Horse Power / Voltage	1/4HP ; 110V / 220V
Net Weight / Gross Weight	52 kgs / 67 kgs
Packing Size (LxWxH)	81x38x50 cm

Standard Accessories:

- Grinding Wheel-1 PC
- Diamond Dresser-1 PC

Optional Accessories:

- Grinding Wheel
- SDC Electroplated Grinding Wheel
- CBN Electroplated Grinding Wheel

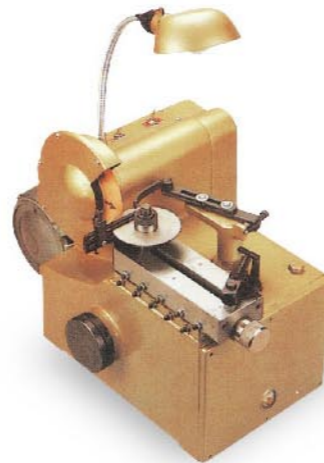

PP-26/PP-26 L Rotary Cutting-off & Grinding Machine

Features:

- Suitable for the tungsten carbide and high speed steel work piece.
- Adopt keyless centering chuck.
- Rotary cutting-off, no heat and steady stiffness.
- Cutting-off and grinding in one machine.

SPECIFICATIONS

Model No.	PP-26	PP-26L
Max. Grinding Capacity	25 mm	
Scale	300L	600L
Size of Cutting-off Wheel	180x1x31.75 mm	
Size of Grinding Wheel	100x50x20 mm	
Speed of Wheel	50HZ 2850 rpm 60HZ 3450 rpm	
Horse Power / Voltage	1HP ; 220V / 380V / 415V	
Net Weight / Gross Weight	88 kgs / 120 kgs	
Packing Size (LxWxH)	59x56x67 cm	

Standard Accessories:

- Grinding Wheel(Type:6A)-1 PC
- General Cutting-off Wheel-1 PC
- Chuck Handle-1 PC

Optional Accessories:

- Grinding Wheel
- SDC Electroplated Grinding Wheel
- CBN Electroplated Grinding Wheel
- SDC Cutting-off Wheel
- CBN Cutting-off Wheel



Precision Drill Grinder



SPECIFICATIONS

Model No.	PP-13A
Grinding Capacity	φ 3 mm~ φ 13 mm
Speed of Wheel	5300 rpm
Weight	10 kgs
Packing Size	33x18x18 cm



SPECIFICATIONS

Model No.	PP-20X
Grinding Capacity	φ 3 mm~ φ 20 mm
Speed of Wheel	4300 rpm
Weight	19 kgs
Packing Size	43x22x22 cm



SPECIFICATIONS

Model No.	PP-26X
Grinding Capacity	φ 12 mm~ φ 26 mm
Speed of Wheel	5300 rpm
Weight	25 kgs
Packing Size	47x27x24 cm



SPECIFICATIONS

Model No.	PP-13X
Grinding Capacity	φ 3 mm~ φ 13 mm
Speed of Wheel	5500 rpm
Weight	10 kgs
Packing Size	34x19.5x21 cm




SPECIFICATIONS

Model No.	PP-13SG
Grinding Capacity	φ 3 mm~ φ 13 mm
Speed of Wheel	4200 rpm
Weight	13 kgs
Packing Size	34x21x21 cm



SPECIFICATIONS

Model No.	PP-13SX
Grinding Capacity	φ 2 mm~ φ 13 mm
Speed of Wheel	4300 rpm
Weight	11 kgs
Packing Size	34x18.5x21 cm



X-type drill



SG drill



Sheet Metal drill

Precision End Mill Grinder



SPECIFICATIONS

Model No.	PP-12D
Grinding Capacity	$\phi 4 \text{ mm} \sim \phi 12 \text{ mm}$
Speed of Wheel	5300 rpm
Weight	9 kgs
Packing Size	33x18x18 cm



SPECIFICATIONS

Model No.	PP-13D
Grinding Capacity	$\phi 4 \text{ mm} \sim \phi 13 \text{ mm}$
Speed of Wheel	6000 rpm
Weight	14 kgs
Packing Size	31x26x29 cm



SPECIFICATIONS

Cutting-off Machine	
Model No.	PP-16C
Grinding Capacity	$\phi 3 \text{ mm} \sim \phi 16 \text{ mm}$
Weight	13.5 kgs
Packing Size	34x21x21 cm



SPECIFICATIONS

Model No.	PP-32D
Grinding Capacity	$\phi 12 \text{ mm} \sim \phi 32 \text{ mm}$
Speed of Wheel	5300 rpm
Weight	24 kgs
Packing Size	47x27x24 cm



SPECIFICATIONS

Model No.	PP-25D
Grinding Capacity	$\phi 12 \text{ mm} \sim \phi 25 \text{ mm}$
Speed of Wheel	4500 rpm
Weight	28 kgs
Packing Size	36x29x34 cm

PP-DM Diamond & PCBN Tool Grinder

Features:

The machine is mainly used for grinding PCD, PCBN, CBN and carbide tools. You can position the tool precisely and make sure the position by CCD and monitor. The CCD is for checking the surface of tools and measure the tools.

Remark: For the diamond/ PCD form tools, we could offer customized service.

SPECIFICATIONS

Model No.	PP-DM
Longitudinal Travel of Cross Work Table	70 mm
Horizontal Travel of Cross Work Table	65 mm
Spindle Center Height	150 mm
Variable Swing Distance	0-15 mm
Variable Swing Speed	0-60 Hz/min.
Variable Swing Position	250 mm
Variable Spindle Angle	$-5^{\circ} \sim 25^{\circ} \pm 10^{\circ}$
Size of Wheel	150x40x40 mm
Speed of Spindle	0-3000 rpm
Voltage	220V
Net Weight / Gross Weight	350 kgs / 420 kgs
Packing Size (LxWxH)	104x104x195 cm

Standard Accessories:


1. Vitrified Diamond Grinding Wheel-1 PC
2. Grinding Wheel Flange-1 SET
3. Flange Wrench-1 PC
4. Work Light-1 SET
5. Cooling System-1 SET
6. CCD & Monitor-1 SET
7. Rock Type Lubricator-1 SET
8. Variable Frequency Drive-2 SETS
9. Tools for General Use-1 SET

Optional Accessories:

1. Vitrified Diamond Grinding Wheel
2. Vitrified Diamond Grinding Wheel (Made in Japan)
3. Grinding Wheel Flange
4. Oil Stone
5. Auto Lubricator
6. Hollow Rotary Reducer
7. Human Machine Interface
8. Measurement Software for CCD
9. Full Guard

Tools for General Use:

1. Hexagon Wrench-10 PCS
2. Screwdriver-1 PC
3. T-Type Wrench-1 PC
4. Open Wrench-4 PCS
5. Hexagon Wrench for Lens-2 PCS

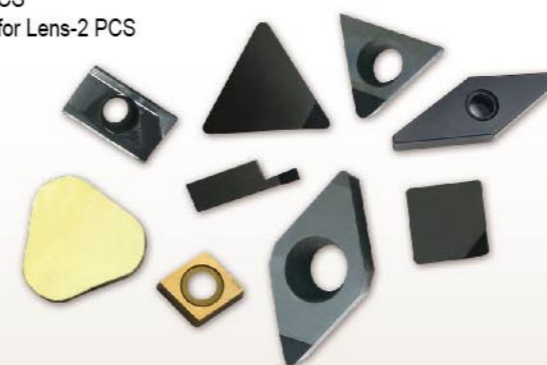

PP-A1

Precision Spindle Polishing Machine

Features:

- Automatic spindle polishing control.
- Keep the precision of spindle and no damage to spindle body.
- One setting for the maximum convenience of operation.

After Use:

- Extend the life of cutting tools.
- Increase workpiece accuracy.
- Reduce the spindle vibration and extend the life of spindle.

SPECIFICATIONS

Model No.	PP-A1
Taper Type of Spindle	BT Series
Speed of Spindle	30000 rpm
Voltage	100V / 110V / 220V / 240V
Net Weight / Gross Weight	11 kgs / 12 kgs
Packing Size (LxWxH)	36x27x45 cm

Standard Accessories:

- Grinding Wheel- for Polishing 1 PC
- Grinding Wheel- for Grease Dirt 1 PC
- Grinding Wheel- for Rust 1 PC
- Transformer-1 SET
- 6mm Chuck-1 PC
- Chuck Wrench-1 PC

Optional Accessories:

- Grinding Wheel- for Polishing 1 PC
- Grinding Wheel- for Grease Dirt 1 PC
- Grinding Wheel- for Rust 1 PC



PP-A2

Tool Holder Maintenance & Polish Machine

Features:

- Extend tool holder life.
- Increase tool holder accuracy.
- Polish & clean the grease and dirt on holder.
- One setting for the maximum convenience of operation.

Standard Accessories:

- Abrasive Paper-3 PCS
- Hexagon Wrench-1 PC

Optional Accessories:

- Abrasive Paper



SPECIFICATIONS

Model No.	PP-A2
Specification of Tool Holder	BT30 / BT40 / BT50
Voltage	110V / 220V
Net Weight / Gross Weight	25 kgs / 27 kgs
Packing Size (LxWxH)	40x40x48 cm



Optional Accessories



MTOR-AC
•Auto cycle motor



WKL-LED
•LED Work light



WKL-HL
•Halogen work light



LINSC-S/M
•Linear scale+DRO



CCD
•CCD



WKCB
•Work cabinet



YC-602
•Dust collection



YC-678
•Dust collection with filter bag



PP-CLM
•Cooling system



LBS
•Level balancing stand




WBS
•Wheel balancing stand



LBS-ARB
•Arbor for balancing stand

Accessories for machine

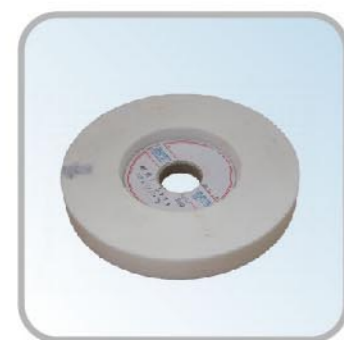

GW-05A
•Grinding wheel-5A



GW-06A
•Grinding wheel-6A



GW-11A
•Grinding wheel-11A




GW-12A
•Grinding wheel-12A



GW-6A245V-WO-SDC/CBN
•Electroplated grinding Wheel-6A245V



GW-6A290V-WO-SDC/CBN
•Electroplated grinding Wheel-6A290V

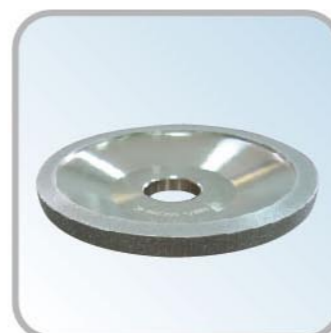

GW-11A2-WO-SDC/CBN
•Electroplated grinding Wheel-11A2



GW-11A2-RD-SDC/CBN
•Resinoid grinding Wheel-11A2




GW-DR
•Diamond dresser



GWFL
•Grinding wheel flange



GWFL-WR
•Flange wrench

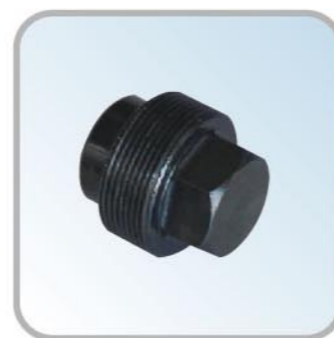

GWFL-SC
•Screw for grinding wheel flange



SHAFT-S
•25.4/31.75
Shaft (Straight shank)



SHAFT-T
•25.4/31.75
Shaft (Taper shank)



MOSTP-01
•Morse taper sleeve-NO.1



MOSTP-02
•Morse taper sleeve-NO.2

Accessories for machine



MOSTP-03
•Morse taper sleeve-NO.3



MOSTP-04
•Morse taper sleeve-NO.4



MOSTP-05
•Morse taper sleeve-NO.5



TL-SCRIP
•Screw pin



CAM-04
•Cam-NO.4



CAM-06
•Cam-NO.6



CAM-08
•Cam-NO.8



CAM-09
•Cam-NO.9



CAM-A2
•Cam-NO.A2



CL-5C
•5C collet
(3-25mm)



CL-5CSP
•5C Special collet
(32mm/42mm)



CL-U2
•PP-U2 collet
(1/8", 1/4", 5/16", 3/8", 1/2", 5/8")



CL-ER
•ER collet
(ER20:1-13mm / ER25:1-16mm / ER40:3-26mm)




CL-ST
•ST collet
(ST32)



CL-STER
•ST/ER Straight collet chuck system



TL-BX
•Tools for General Use
1.Diamond dresser-1 pc
2.Hexagon key-10 pcs(1set)
3.Oil bottle-1 pc
4.Screwdriver-1 pc
5.Open wrench-1 pc

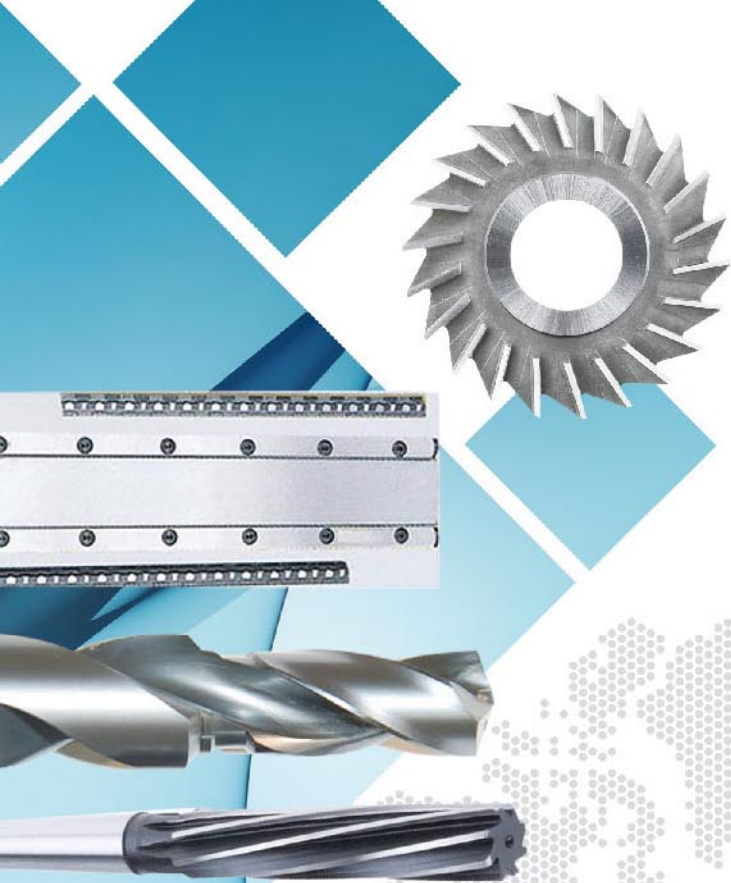

www.pei-ping.com

Expert on Tool & Cutter Grinders



SINCE 1980

PEIPING PRECISION ENTERPRISE CO., LTD.

No.71, 32th Rd., Taichung Industrial Park,

Taichung City 40768, TAIWAN

TEL: +886-4-2358-9088 FAX: +886-4-2358-9098

E-mail: service@pei-ping.com

<http://www.pei-ping.com>



* Additional fees for being equipped with **CE**
* Specifications subject to change without notice.